

56 Sparta Avenue • Newton, New Jersey 07860  
(973) 300-3000 Sales • (973) 300-3600 Fax  
www.thorlabs.com

**THORLABS**

## LCC1114-A - July 6, 2015

Item # LCC114-A was discontinued on July 6, 2015. For informational purposes, this is a copy of the website content at that time and is valid only for the stated product.

### MULTI-WAVE LIQUID CRYSTAL VARIABLE RETARDERS / WAVE PLATES

- ▶ Nematic Liquid Crystal Multi-Wave Variable Retarder
- ▶ Available with  $>4\lambda$  or  $>6\lambda$  Max Retardation
- ▶  $\varnothing 10$  mm Clear Aperture, AR Coated for Visible Light



**LCC1114-A**  
 $\varnothing 10$  mm Clear Aperture,  
 $>4\lambda$  Variable Retarder



**LCC1115-A**  
 $\varnothing 10$  mm Clear Aperture,  
 $>6\lambda$  Variable Retarder  
White Line Marks Slow Axis



**LCC25**  
Voltage Controller

[Hide Overview](#)

## OVERVIEW

### Features

- Variable Wave Plate to Continuously Control the Polarization State of Light
- Retardance Range:
  - ~40 nm to  $>4\lambda$  (LCC1114-A)
  - ~60 nm to  $>6\lambda$  (LCC1115-A)
- Clear Aperture:  $\varnothing 10$  mm
- Surface Quality: 40-20 Scratch-Dig
- Retardance Uniformity:  $< \lambda/50$  Over the Entire Clear Aperture


Thorlabs' Multi-Wave Liquid Crystal Variable Retarders (LCVR) use a nematic liquid crystal cell to function as a variable wave plate. The absence of moving parts provides quick switching times on the order of milliseconds (see the *Switching Time* tab for details). These multi-wave retarders are AR coated for 350 - 700 nm and can reach up to  $>4\lambda$  (LCC1114-A) or  $>6\lambda$  (LCC1115-A) retardance (see the *Performance* tab for transmission and retardance data). The LC cell spacer aids these retarders in achieving their maximum retardance values; the LCC1114-A uses a 20  $\mu\text{m}$  spacer while the LCC1115-A uses a 30  $\mu\text{m}$  spacer. They have a  $\varnothing 10$  mm clear aperture with a 1" outer diameter, making them compatible with any of our  $\varnothing 1$ " optics mounts for 8 mm thick optics. An engraved white line on the front of the housing marks the slow axis.

These liquid crystal variable retarders provide excellent uniformity, low optical losses and low wavefront distortion. Our retarders also provide quick switching time, broad operating temperature range, and a broad wavelength range. Please see the *Specs*, *Performance*, and *Switching Time* tabs for complete details.

A Liquid Crystal Variable Retarder consists of a transparent cell filled with a solution of Liquid Crystal (LC) molecules and functions as a variable wave plate. Two parallel faces of the cell wall are coated with an Indium Tin Oxide (ITO) transparent conductive film so that a voltage can be applied across the cell. The orientation of the LC molecules is determined by the alignment layer in the absence of an applied voltage. When an AC voltage is applied, the molecules will change from their default orientation to an orientation based on the applied rms value of the voltage. Hence, the phase offset in a linearly polarized beam of light can be actively controlled by varying the applied voltage.


The LCC25 controller, sold below, provides active DC offset compensation, while applying an AC voltage (0 to 25  $V_{\text{rms}}$ ). The DC offset compensation automatically zeros the DC bias across the LC device in order to counteract the buildup of charges. It is fully compatible with all of the liquid crystal retarders sold by Thorlabs.

### Operating Principle



**High Retardance**

In their nematic phase, liquid crystal molecules have an ordered orientation, which together with the stretched shape of the molecules creates an optical anisotropy. When an electric field is applied, the molecules align to the field and the level of birefringence is controlled by the tilting of the LC molecules.



**Low Retardance**

### Selection Guide for LC Retarders

Type	Clear Aperture
Half Wave	$\varnothing 10$ mm or $\varnothing 20$ mm
Half Wave, Thermally Stabilized	$\varnothing 10$ mm
Three-Quarter Wave	$\varnothing 10$ mm or $\varnothing 20$ mm
Full Wave	$\varnothing 10$ mm or $\varnothing 20$ mm
Full Wave, Thermally Stabilized	$\varnothing 20$ mm
Multi-Wave	$\varnothing 10$ mm
Multi-Wave, Integrated Controller	$\varnothing 10$ mm
Custom LC Retarders	

[Hide Specs](#)

## S P E C S

Item #	LCC1114-A	LCC1115-A
Wavelength Range	350 - 700 nm	
Liquid Crystal Material	Nematic Liquid Crystal	
Retardance Range	~40 nm to $>4\lambda$	~60 nm to $>6\lambda$
Clear Aperture	$\varnothing$ 10 mm	
Surface Quality	40-20 Scratch-Dig	
Switching Speed (Rise/Fall, Typical) <sup>a</sup>	630 ms / 125 ms From 1 $\lambda$ to 2 $\lambda$	867.5 ms / 252.5 ms From 1 $\lambda$ to 2 $\lambda$
AR Coating	$R_{avg} < 0.5\%$ at all Air-to-Glass Surfaces for Specified Wavelength Range	
Wavefront Distortion	$\leq \lambda/4$ (@635 nm)	
Retardance Uniformity	$< \lambda/50$ Over the Entire Clear Aperture	
Housing Outer Diameter	1"	
Storage Temperature	-30 to 70 °C	
Operation Temperature	-20 to 45 °C	
Compatible Mounts	RSP1 (RSP1/M), CRM1 (CRM1/M), CRM1P (CRM1P/M), KM100	

- Specified at 25 °C. Switching speed is highly dependent on several factors, including voltage change and cell temperature. See the *Switching Time* tab for more details.

[Hide Performance](#)

## P E R F O R M A N C E

## LC Retarder Performance


In their nematic phase, liquid crystal molecules have an ordered orientation, which together with the stretched shape of the molecules, creates an optical anisotropy. When an electric field is applied, the molecules align to the field and the level of birefringence is controlled by the tilting of the LC molecules. To minimize effects due to ions in the material, an LC device must be driven using an alternating voltage. Our LCC25 controller is designed to minimize the DC in the driving signal in the operating range of 0 V to 25 V. To accomplish this the LCC25 controller automatically zeros the DC bias across the LC device in order to counteract the buildup of charges. The LC material also exhibits some chromatic dispersion due to changes in the molecular polarizability. To account for this, we provide the retardation data below for two wavelengths in each wavelength range.

Additionally, the LC retardation also depends on the temperature of the device. As temperature increases the material density decreases and the retardation decreases with it (however as seen in the switching time tab, the switching speed of the LC improves at higher temperatures). Generally, the LC's refractive indices (both ordinary and extraordinary) change more drastically as temperature nears the LC's clearing temperature. As such, we choose to use materials high clearing temperature to minimize the temperature dependence when used at room temperature.


[Click Here to Download LCC1114-A Data](#)

[Click Here to Download LCC1115-A Data](#)


## LCC1114-A (350 - 700 nm)

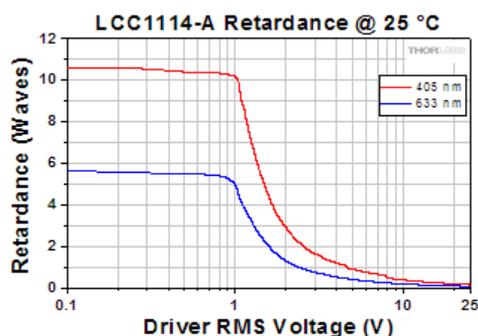

[Click to Enlarge](#)

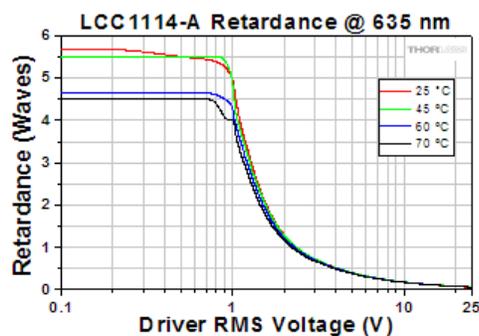




[Click to Enlarge](#)

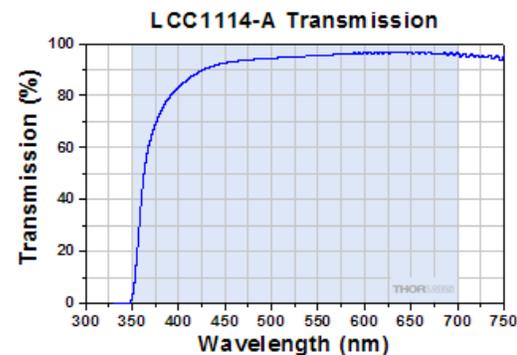

[Click to Enlarge](#)

The blue shaded region indicates the wavelength range specified for the AR coating.

## LCC1115-A (350 - 700 nm)

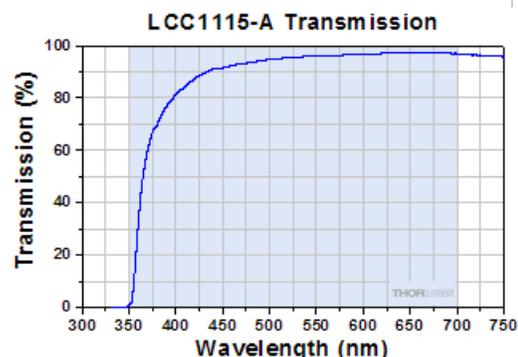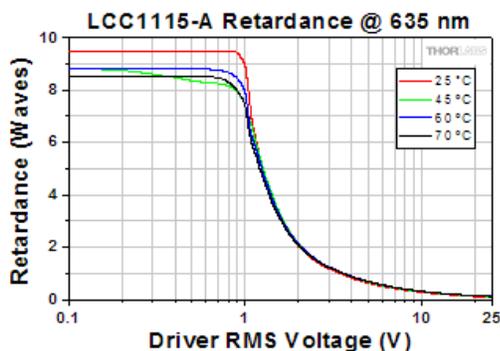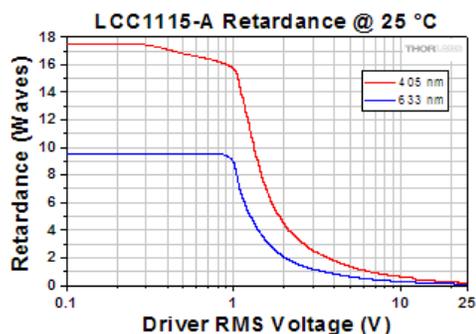

The blue shaded region indicates the wavelength range specified for the AR coating.

[Hide Switching Time](#)

### SWITCHING TIME & NBSP ;

#### LC Retarders Switching Time


Liquid crystal retarders feature a short switching time compared to mechanical variable wave plates due to the lack of moving parts. The switching time of a liquid crystal retarder depends on several variables, some of which are controlled in the manufacturing process, and some by the user.

In general liquid crystal retarders will always switch faster when changing from a high to a low birefringence value. Additionally, the higher the operating temperature is, the faster the retarder will switch from one state to another due to the decreased viscosity at the higher temperature.

For any given retarder, the switching speed will always be faster at higher voltages. The graph to the right depicts examples of switching between different voltages. If trying to achieve faster switching speed, we recommend using the retarder together with a fixed waveplate, to use the variable retarder at a higher voltage.

In addition, the material's viscosity and hence the switching speed also depend on temperature of the LC material. As can be seen below, the switching speed can increase by as much as two times by heating the LC retarder. Our standard LC retarders are designed to work at temperatures of up to 45 °C, where they can still maintain the specified retardation. If additional speed is required, the retarders can work at temperatures up to 70 °C, but the maximum retardation value will be lower.

The switching speed also is directly proportional to the thickness of the LC retarder, the rotational viscosity of the LC material, and the dielectric anisotropy of the LC material. However, since each of those variables affects other operating parameters as well, our LC retarders are designed to optimize overall performance, with a special emphasis on switching time. We also offer OEM and custom LC retarders optimized for other parameters, as well as faster liquid crystal retarders. Contact [techsupport@thorlabs.com](mailto:techsupport@thorlabs.com) for details.

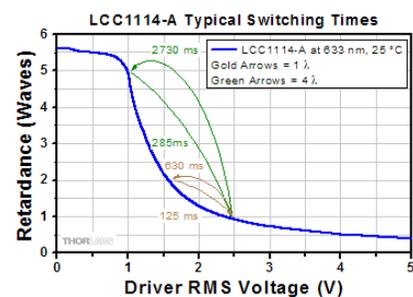

Click to Enlarge  
Switching Time Decreases with Smaller Retardance Changes

## Sample Switching Times at Various Temperatures

Switching times were tested by measuring the rise time from  $V_1$  to  $V_2$  and the fall time from  $V_2$  to  $V_1$  with the liquid crystal retarder being held at the specified temperature.  $V_1$  is fixed all the tests, it is the control voltage when the LC retarder is at  $1 \lambda$  retardation.  $V_2$  is the voltage at the target retardation value ( $2 \lambda$ ,  $4 \lambda$ ,  $5 \lambda$ , and  $8 \lambda$  are given in the tables below). Please note that switching times at lower voltages (for instance, if  $V_1=5 \text{ V}$ ) are longer than the switching times specified below.

### LCC1114-A

Temperature	$V_1$	$V_2$	Rise Time (ms)	Fall Time (ms)
<b>From <math>1 \lambda</math> to <math>2 \lambda</math></b>				
25 °C	2.42	1.62	630	125
45 °C	2.42	1.62	220	50
60 °C	2.42	1.62	225	67.5
70 °C	2.42	1.62	142.5	72.5
<b>From <math>1 \lambda</math> to <math>4 \lambda</math></b>				
25 °C	2.42	1.14	1795	250
45 °C	2.42	1.14	502.5	97.5
60 °C	2.42	1.14	567.5	82.5
70 °C	2.42	1.14	235	77.5
<b>From <math>1 \lambda</math> to <math>5 \lambda</math></b>				
25 °C	2.42	1.00	2730	285
45 °C	2.42	1.00	1285	165
60 °C	2.42	1.00	970	125
70 °C	2.42	1.00	737.5	90


### LCC1115-A

Temperature	$V_1$	$V_2$	Rise Time (ms)	Fall Time (ms)
<b>From <math>1 \lambda</math> to <math>2 \lambda</math></b>				
25 °C	3.1	1.92	867.5	252.5
45 °C	3.1	1.92	495	37.5
60 °C	3.1	1.92	495	87.5
70 °C	3.1	1.92	330	77.5
<b>From <math>1 \lambda</math> to <math>4 \lambda</math></b>				
25 °C	3.1	1.34	1285	280
45 °C	3.1	1.34	675.5	135
60 °C	3.1	1.34	735	115
70 °C	3.1	1.34	837.5	92.5
<b>From <math>1 \lambda</math> to <math>8 \lambda</math></b>				
25 °C	3.1	1.04	3530	450
45 °C	3.1	1.04	1710	162
60 °C	3.1	1.04	2270	135
70 °C	3.1	1.04	1755	145

## APPLICATIONS

### Alignment

In order to precisely align the axis of the liquid crystal cell, mount the retarder in an appropriate rotation mount (e.g. the RSP1 or the CRM1P for our Ø10 mm clear aperture retarders and RSP2 or the LCRM2 for our Ø20 mm clear aperture retarders). Then set up a detector or power meter to monitor the transmission of a beam through a pair of crossed linear polarizers. Next place the LC retarder between two crossed polarizers with the slow axis aligned with the transmission axis of the first polarizer. Then slowly rotate it until the transmitted intensity is minimized. In this configuration, the LC retarder is ready for phase modulation applications.

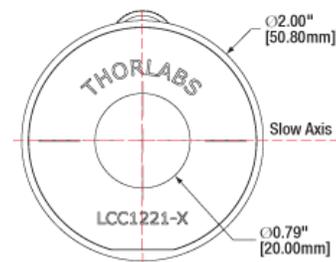

Drawing indicates the slow and fast axes


To operate as a light intensity modulator or shutter, again find the minimum transmitted intensity as prescribed above. Once the minimum is found, rotate the retarder by  $\pm 45^\circ$ . This will maximize the transmitted intensity through the crossed polarizers for most LC retarders (e.g., zero-order quarter- or half-wave plates). However, this rule of thumb does not rigidly hold for multi-wave phase retarders using broadband sources due to the wavelength dependency of the retardation.

The slow (extraordinary) axis of the liquid crystal retarder corresponds to the orientation of the long axis of the liquid crystal molecules when no voltage is being applied. Applying a voltage will cause the orientation direction of the liquid crystal molecules to rotate out of the plane of the drawing, changing the retardation. Thorlabs LC retarders are nematic liquid crystal devices, which must be driven with an AC voltage in order to prevent the accumulation of ions and free charges, which degrades performance and can cause the device to burn out.

### Applications

#### Polarization Control with a Liquid Crystal Variable Retarder

The LCVR can be effectively used as a variable zero-order wave plate over a broad spectrum of wavelengths. The optical axis of the LCVR is defined as the major axis of the liquid crystal molecules when no voltage is being applied to the cell, which are all aligned due to the LC alignment layer. When using the LCVR to control the polarization of a beam, the linearly polarized input beam should be aligned so that its polarization axis is oriented at an angle of  $45^\circ$  with respect to the optical axis of the LCVR in order to maximize the dynamic range of the optic. The schematic below shows how the output state of polarization will change as retardance is decreased (RMS voltage increased).

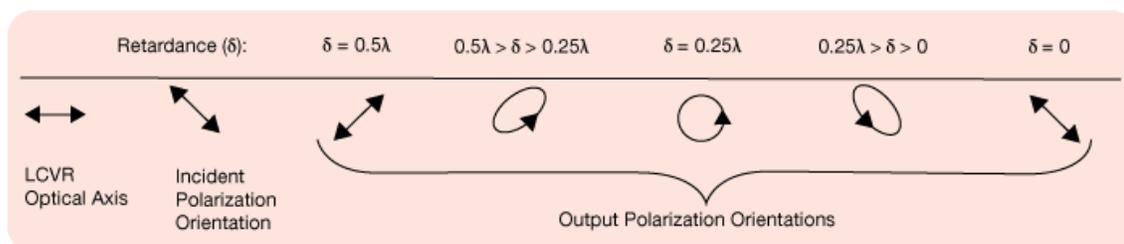

#### Pure Phase Retarder with Liquid Crystal Variable Retarder

In order to only effect the phase of the incident beam, the linearly polarized input beam must have its polarization axis aligned with the optical axis of the liquid crystal retarder. As  $V_{rms}$  is increased, the phase offset in the beam is decreased. Pure phase retarders are often used in interferometers to alter the optical path length of one arm of the interferometer with respect to the other. With an LCVR, this can be done actively.

[Hide LC Controller](#)

## LC CONTROLLER

The LCC25 liquid crystal variable retarder controller produces a 2000 Hz square wave output with an amplitude that can be varied from 0 to 25  $V_{rms}$ .

The output amplitude can be set via the front panel controls, the USB interface, and the external input. Both the front panel and USB interface allow the user to select two voltage levels, Voltage 1 and Voltage 2. When the LCC25 is operated in the constant voltage mode, the output of the controller will be a 2000 Hz square wave with an amplitude equal to either of the two set voltage levels (Figure A). If the LCC25 controller is operating in the modulation mode, the output 2000 Hz square wave will be modulated in amplitude between the two voltage settings with a modulation frequency that can be set by the user to be between 0.5 and 150 Hz (Figure B).

The modulated mode can be used to measure the response time of the LC


#### LCC25 Specifications

LCC25 Specifications	
<b>Electrical Specs</b>	
<b>Adjustable Output Voltage</b>	$\pm 25$ V
<b>External Input Voltage</b>	0 to 5 VDC
<b>Voltage Resolution</b>	1.0 mV
<b>Adjustable Internal Modulation Frequency</b>	0.5 to 150 Hz @ 50% Duty Cycle
<b>Switching Frequency</b>	2,000 $\pm$ 5 Hz, 50% Duty Cycle
<b>Slew Rate</b>	10 V/ms
<b>DC Offset Compensation</b>	$\pm 10$ mV


retarder.

External or remote control of the LCC25 is possible using the external input or the USB interface. The external input accepts a 0 to 5 VDC signal that modulates the 0 to 25 V<sub>rms</sub> output of the LCC25 between the two set voltages. The USB interface can be used to send line commands to the controller so that the LCC25 can be used in automated lab sequences.

In order to prevent the separation and build up of charges in the liquid crystal layer, the LCC25 will automatically detect and correct any DC offset in real time to within  $\pm 10$  mV.

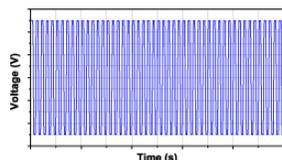

**Figure A.** A plot of the output voltage of the LCC25 Liquid Crystal Controller when it is being operated in the constant voltage mode.

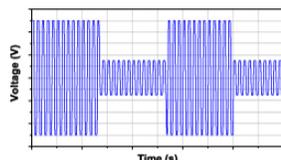

**Figure B.** A plot of the output voltage of the LCC25 Liquid Crystal Controller when the output voltage is being modulated between the two set voltages.

## Software for the LCC25 Controller

### Software

Version 2.0.1

GUI Interface for controlling the Liquid Crystal Retarder Controller via a PC. To download, Click the button below.



### GUI Interface


The GUI interface included with the software provides access to all of the settings of the liquid crystal retarder controller. For example, the user can select one of two user-defined voltages or a modulation mode that oscillates between these two voltages at a user-defined frequency. As shown in the above screen shot, the applied voltage is shown in a plot with respect to time. Both the output and external input can be turned on and off via the GUI. In addition, advanced features allow the user to define a custom waveform by specifying the starting voltage, ending voltage, the voltage step size, and the dwell time. The waveform may be previewed on the screen before it is output to the retarder, and it may be saved so that the LCC25 can be restarted quickly in the future. The GUI is available as a stand-alone or LabVIEW based version for flexibility in implementation.

### Custom Software Development

Users may also use the provided C/C++ and LabVIEW software development kits for implementing the liquid crystal retarder controller with other instruments. Sample C++ code and LabVIEW programs help to illustrate how the C commands and LabVIEW VIs can be utilized. Full documentation on the available commands is provided with the software.

Max Output Current	15 mA
AC Power	85 – 264 VAC, 47 – 63 Hz, 25 VA
Fuse Rating	125 mA, 5 x 20 mm SLO-BLO
Warm Up Time	30 Minutes
<b>Physical Specs</b>	
External Input Connector	BNC
External Input Enable	Front Panel: INT/EXT enable Key
External Input Indicator	Green LED
Output Connector	BNC
Output Enable	Front Panel: OUTPUT ENABLE Key
Output Indicator	Green LED
Rotary Knob	Digital Encoder
Display	LCD 16 x 2
Power Switch	Rocker Switch
USB interface	USB Standard B Plug
Dimensions	9" x 5" x 12.5" 228.6 mm x 127 mm x 317.5 mm
Weight	3.6 lbs
Operating Temperature Range	10 to 40 °C
Maximum Relative Humidity	85%
Other	Tilting Rubber-Padded Feet

Click to Enlarge  
Screen shot of the GUI interface in  
Modulation Mode.

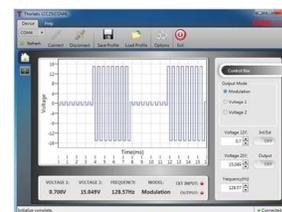

[Hide Custom Capabilities](#)

## CUSTOM CAPABILITIES

### Thorlabs' Custom Liquid Crystal Capabilities

Thorlabs offers a large variety of liquid crystal retarders from stock, including 1/2-, 3/4-, full-wave, and multi-wave models with a  $\varnothing 10$  mm or  $\varnothing 20$  mm clear aperture as well as 1/2-wave temperature-controlled models. However, we also offer OEM and custom retarders. The retardance range, coating, rubbing angle, temperature stabilization, and size can be customized to meet many unique optical designs. We also offer other custom liquid crystal devices, such as empty LC cells, polarizaton rotators, and noise eaters. For more information about ordering a custom liquid crystal device, please

contact Thorlabs' technical support.

Our engineers work directly with our customers to discuss the specifications and other design aspects of a custom liquid crystal retarder. They will analyze both the design and feasibility to ensure the custom products are manufactured to high-quality standards and in a timely manner.

### Polyimide (PI) Coating and Rubbing - Custom Alignment Angle

In their nematic phase, liquid crystal molecules naturally align to an average orientation, which together with their stretched shape, creates an optical anisotropy, or direction-dependent optical effect. The orientation of the LC molecules in an LC cell, in the absence of an applied voltage, is determined by the alignment layer, created by the polyimide (PI) coating and rubbing angle. Rubbing creates grooves, which the liquid crystal molecules will align to. Users can choose any initial orientation of LC molecules by specifying the rubbing angle.



Click to Enlarge  
Liquid Crystal Cell Seal Application



Click to Enlarge  
Custom Liquid Crystal Cell  
Without Case

### Custom Cell Spacing

The wall spacing inside of the liquid crystal cell, which determines the thickness of LC material, can be customized during the manufacturing process. The retardance range of an LC cell is dependent on the LC material thickness:

$$\delta = \frac{2\pi d \Delta n}{\lambda_v}$$

Here,  $\delta$  is the retardance in waves,  $d$  is the thickness of the LC material,  $\lambda_v$  is the wavelength of light, and  $\Delta n$  is the birefringence of the LC material used. Thus, for a given wavelength, the retardance is determined by the wall spacing inside the LC cell (i.e., the thickness of LC layer). We offer standard retardance ranges of  $\lambda/2$  to 30 nm,  $3\lambda/4$  to 30 nm, and  $\lambda$  to 30 nm, but higher retardance ranges may also be ordered.

### Custom Liquid Crystal Material

Customers can also provide their own liquid crystal material, and Thorlabs will use it to fill the liquid crystal cell. Since different liquid crystal materials have different birefringence values, varying the material enables a different retardance range.

### Temperature Control/Switching Time

A temperature sensor can also be integrated into the LC variable retarder. Using a temperature controller and a heater, the temperature of the retarder can be actively stabilized to within  $\pm 0.1$  °C. The viscosity of the liquid crystal material is lowered at higher temperatures, allowing the retarder to switch from one state to another due to the decreased viscosity. An active temperature control system can be used to heat the retarder, allowing it to operate at higher switching speeds.

### Assembly / Housing

If desired, we can manufacture custom liquid crystal retarders without housings.

### Testing

Each LC retarder is tested for birefringence, uniformity, and fast axis angle, using the measurement setup shown in the photo to the left. The equipment measures the 2-dimensional birefringence distribution using wave plates and a CCD camera. The image to the right shows a sample test result of a liquid crystal retarder, showing excellent uniformity.

### For More Information


Contact Thorlabs' technical support for more information about our custom liquid crystal device options or to place an order.



Click to Enlarge  
Liquid Crystal Cell Filling in a Vacuum Chamber



Click to Enlarge  
Custom Liquid Crystal Cell Test  
Setup

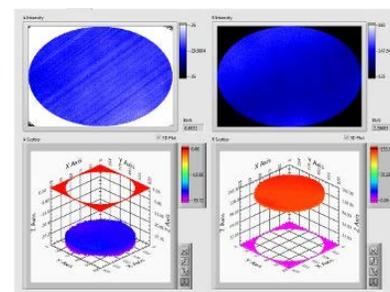

Click to Enlarge  
Custom Liquid Crystal Cell Test Result

[Hide Patterned Retarders](#)

PATTERNED RETARDERS & NBSP ;

**Features**

- Build a Custom Microretarder
- Customize Size, Shape, and Substrate Material
- Retardance Range: 50 - 550 nm
- Fast Axis Resolution: <math><1^\circ</math>
- Retardance Fluctuations Under 30 nm

**Applications**

- 3D Displays
- Polarization Imaging
- Diffractive Optical Applications: Polarization Gratings, Polarimetry, and Beam Steering

Thorlabs offers customizable patterned retarders, available in any size from  $\varnothing 100 \mu\text{m}$  to  $\varnothing 2''$ . These custom retarders are composed of an array of microretarders, each of which has a fast axis aligned to a different angle than its neighbor. The size and shape of the microretarders are also customizable. They can be as small as  $30 \mu\text{m}$  and in shapes including circles, squares, and polygons. This control over size and shape of the individual microretarders allows us to construct a large array of various patterned retarders to meet nearly any experimental or device need.

These patterned retarders are constructed from our liquid crystals and liquid crystal polymers. Using photo alignment technology, we can secure the fast axis of each microretarder to any angle within a resolution of  $1^\circ$ . Figures 1 - 3 show examples of our patterned retarders. The figures represent measured results of the patterned retarder captured on an imaging polarimeter and demonstrate that the fast axis orientation of any one individual microretarder can be controlled separately and determinately from its neighbors.

The manufacturing process for our patterned retarders is controlled completely in-house. It begins by preparing the substrate, which is typically N-BK7 or UV fused silica (although other glass substrates may be compatible as well). The substrate is then coated with a layer of photoalignment material and placed in our patterned retarder system where sections are exposed to linearly polarized light to set the fast axis of a microretarder. The area of the exposed sections depends on the desired size of the microretarder; the fast axis can be set between  $0^\circ$  and  $180^\circ$  with a resolution  $<1^\circ$ . Once set, the liquid crystal cell is constructed by coating the device with a liquid crystal polymer and curing it with UV light.

By supplying Thorlabs with a drawing of the desired patterned retarder or an excel file of the fast axis distribution, we can construct almost any patterned retarder. We can also produce variable retardance patterned retarders. For more information on creating a patterned retarder, please contact Tech Support.

Custom Capability	Custom Specification
Patterned Retarder Size	$\varnothing 100 \mu\text{m}$ to $\varnothing 2''$
Patterned Retarder Shape	Any
Microretarder Size	$\geq \varnothing 30 \mu\text{m}$
Microretarder Shape	Round, Square, Hexagon, or Polygon
Retardance Range @ 632.8 nm	50 to 550 nm
Substrate	N-BK7, UV Fused Silica, or Other Glass
AR Coating	Available

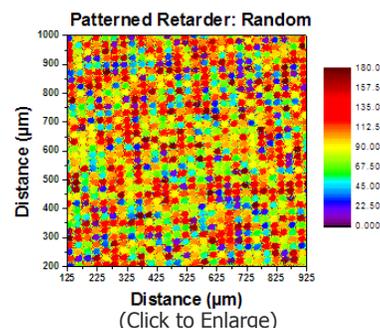


Figure 1: Patterned Retarder with Random Distribution

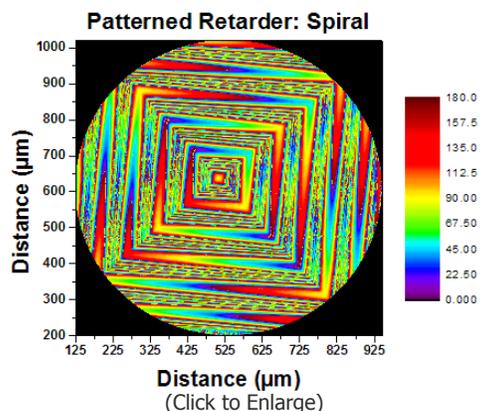


Figure 2: Patterned Retarder with a Spiral Distribution

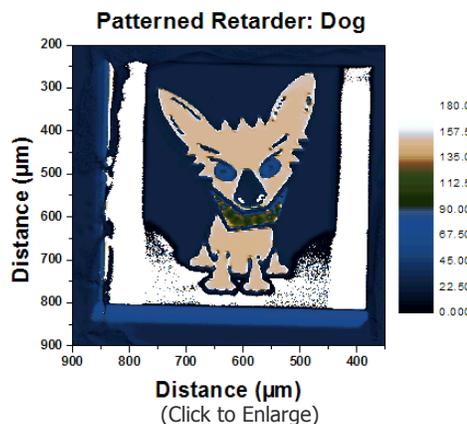


Figure 3: Patterned Retarder with a Pictorial Distribution

[Hide Ø10 mm Liquid Crystal Retarders](#)

### Ø10 mm Liquid Crystal Retarders



- ▶ Ø10 mm Clear Aperture
- ▶ 1" Outer Diameter
- ▶ 2 Retardation Ranges Available

Thorlabs' Ø10 mm clear aperture, multi-wave liquid crystal retarders are available with AR coatings for 350 - 700 nm and are available with a max retardance of either  $>4\lambda$  (LCC1114-A) or  $>6\lambda$  (LCC1115-A). These retarders have an outer diameter of 1", making them compatible with any of our Ø1" optic mounts for 8 mm thick optics. The RSP1 mount provides precise rotational adjustment and post mounting capability, while the CRM1P adds 30 mm cage-mounting versatility.

Part Number	Description	Price	Availability
LCC1114-A	Customer Inspired!Multi-Wave Liquid Crystal Retarder, Ø10 mm CA, $>4\lambda$ , ARC 350 - 700 nm	\$750.00	Lead Time
LCC1115-A	Customer Inspired!Multi-Wave Liquid Crystal Retarder, Ø10 mm CA, $>6\lambda$ , ARC 350 - 700 nm	\$850.00	Today

[Hide Liquid Crystal Controller](#)

### Liquid Crystal Controller



- ▶ Output Voltage Adjustment Range:  $\pm 25$  VAC ( $f = 2000 \pm 5$  Hz)
- ▶ Max Output Current: 15 mA
- ▶ Output Connector: BNC
- ▶ AC Power Requirements: 85 - 264 VAC, 47 - 63 Hz, 25 VA
- ▶ See the *LC Controller Tab* Above for More Information

The LCC25 is a liquid crystal controller compatible with all Thorlabs LC Variable Retarders and is ideal for driving most other nematic liquid crystal devices. Nematic LC retarders must be driven with an AC voltage in order to prevent the separation and build up of charge, which can cause the device to burn out. In addition to the 2000 Hz AC drive voltage, the LCC25 controller automatically zeros the DC bias across the LC device in order to counteract the buildup of charges. The AC output voltage of the LCC25 controller can be adjusted using the front panel controls, an external 0 - 5 VDC TTL input, and via the USB interface. For more information about the LCC25 controller and for a complete list of its specifications, please see the *LC Controller* tab.

Part Number	Description	Price	Availability
LCC25	Liquid Crystal Controller, 0-25 VAC, Square Wave, 50% Duty Cycle	\$1,270.00	Today

[http://www.thorlabs.com/newgrouppage9.cfm?objectgroup\\_id=8454](http://www.thorlabs.com/newgrouppage9.cfm?objectgroup_id=8454)