



## FINAL INSPECTION REPORT

### 1x2 Wavelength Combiner / Splitter (WDM)

Item #: WD9850FB  
SN: T021957

Center Wavelength  
White Port: 980 nm  
Red Port: 1550 nm  
Maximum Optical Power<sup>a</sup>  
With Connectors or Bare Fiber: 1 W  
Spliced: 5 W  
Fiber Type: Corning HI 1060 FLEX

Test Data at Center Wavelength <sup>b</sup>		
Port Jacket Color	White	Red
Wavelength	980 nm	1550 nm
Transmission <sup>c</sup>	97.3%	99.5%
Insertion Loss <sup>d</sup>	0.12 dB	0.02 dB
Isolation <sup>e</sup>	25.8 dB	33.4 dB

Test Data over Bandwidth <sup>b</sup>		
Bandwidth	970-990 nm	1540-1560 nm
Transmission <sup>c</sup>	99.1%	99.5%
Insertion Loss <sup>d</sup>	0.04 dB	0.02 dB
Isolation <sup>e</sup>	25.1 dB	24.2 dB

a. Specifies the maximum power allowed through the component. Performance and reliability under high power conditions must be determined within the user's setup.



b. All values are measured at room temperature without connectors.

c. Calculated from measured insertion loss data below.

d. Insertion loss is the ratio of the input power to the output power for each port of the wavelength combiner / splitter (WDM).

e. Isolation represents the minimum crosstalk between ports.

Verified by: \_\_\_\_\_

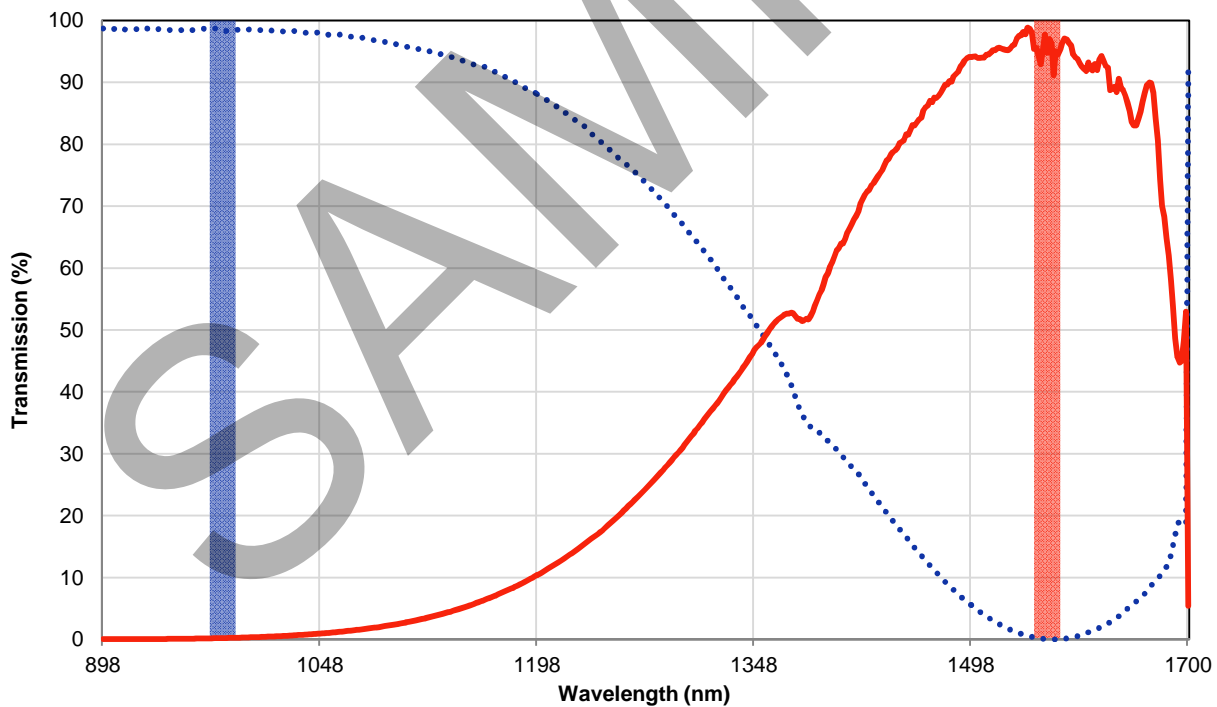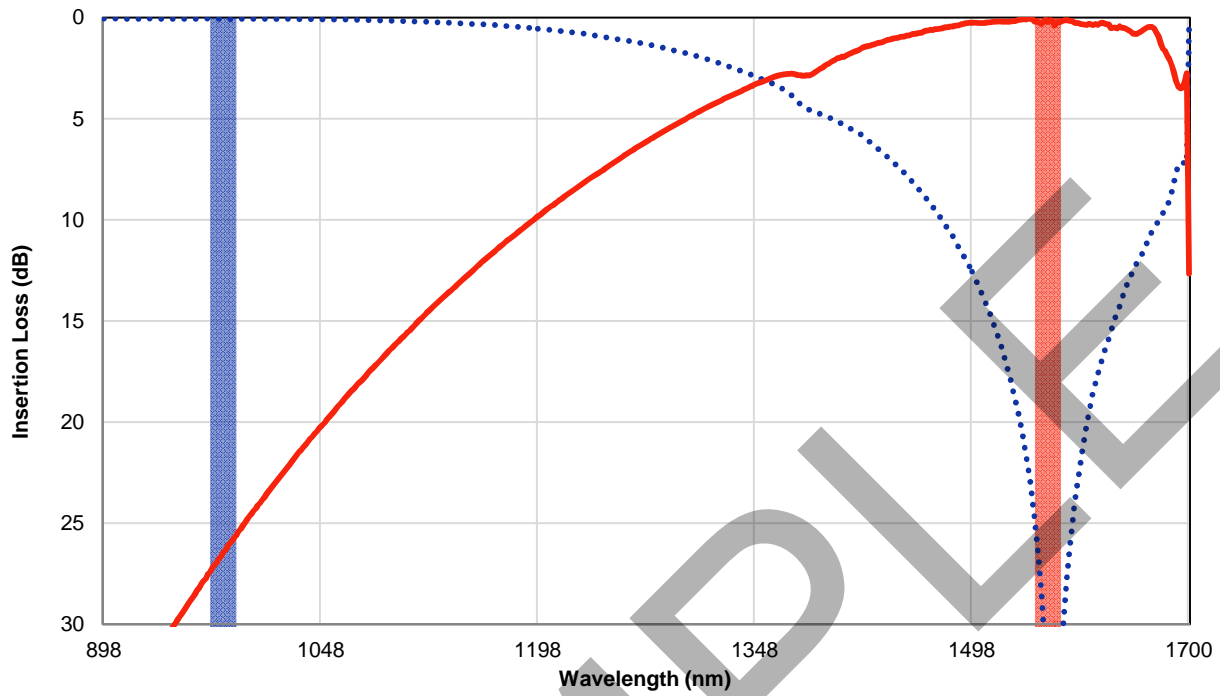

This wavelength combiner / splitter (WDM) operation is only guaranteed over the specified bandwidth as defined by the colored regions above. Thorlabs displays a wider wavelength range to provide insight into how this particular device would perform if used outside its guaranteed operating range. The out-of-band performance can vary from device to device.