



FINAL INSPECTION REPORT

1x3 Wavelength Combiner / Splitter (WDM)

Item #: RGB26HA

SN: A000172


Center Wavelength
Blue Port: 473 nm
Green Port: 532 nm
Red Port: 640 nm
Maximum Optical Power ^a
With Connectors or Bare Fiber: 50 mW
Spliced: 100 mW
Fiber Type: Nufern 460-HP

Test Data at Center Wavelength ^b				
Port Jacket Color		Blue	Green	Red
Wavelength		473 nm	532 nm	640 nm
Transmission ^c		91.83%	96.61%	94.19%
Insertion Loss ^d		0.37 dB	0.15 dB	0.26 dB
Isolation ^e	White Port	N/A	19.8 dB	16.2 dB
	Red Port	18.9 dB	N/A	27.2 dB
	Blue Port	15.6 dB	24.7 dB	N/A

Test Data over Bandwidth ^b				
Bandwidth		468-478 nm	527-537 nm	635-645 nm
Transmission ^c		84.3%	91.6%	89.5%
Insertion Loss ^d		0.74 dB	0.38 dB	0.48 dB
Isolation ^e	White Port	N/A	15.91 dB	11.20 dB
	Red Port	12.61 dB	N/A	18.44 dB
	Blue Port	11.00 dB	20.91 dB	N/A

- a. Specifies the maximum power allowed through the component. Performance and reliability under high power conditions must be determined within the user's setup.
- b. All values are measured at room temperature without connectors.
- c. Calculated from measured insertion loss data below.
- d. Insertion loss is the ratio of the input power to the output power for each port of the wavelength combiner / splitter (WDM).
- e. Isolation represents the minimum crosstalk between ports.

Verified by: _____

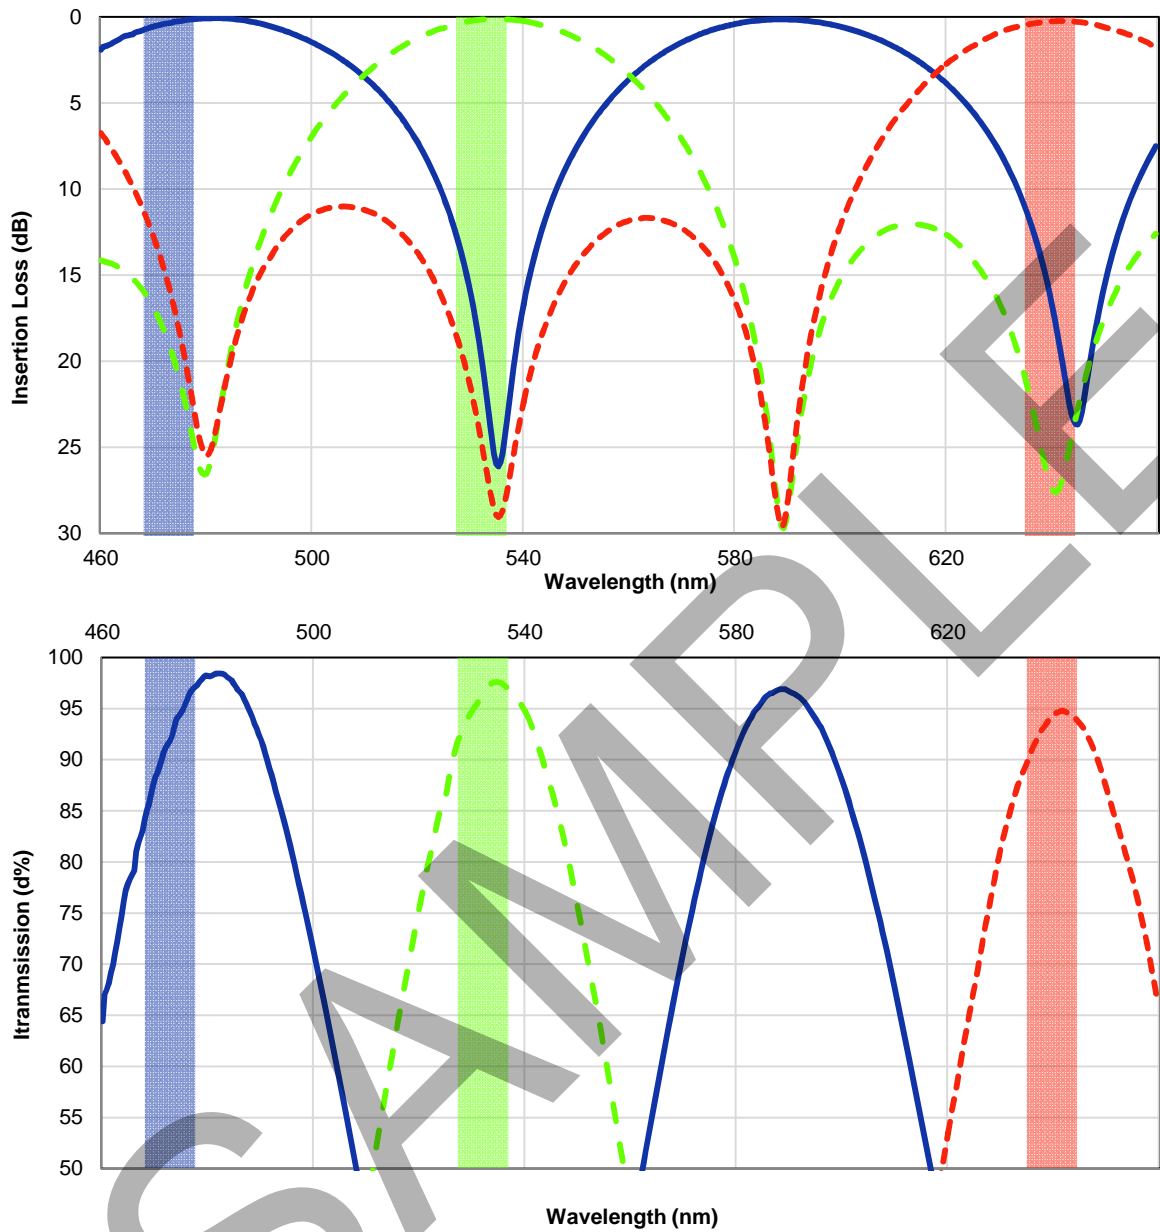

This wavelength combiner / splitter (WDM) operation is only guaranteed over the specified bandwidth as defined by the colored regions above. Thorlabs displays a wider wavelength range to provide insight into how this particular device would perform if used outside its guaranteed operating range. The out-of-band performance can vary from device to device.